

MECHRON

22 HP









Engine

The Daedong 3C100LFU(1,007cc, 22hp) diesel engine has been field proven for durability and dependability while offering improved fuel economy.




Brake System

Long lasting front and rear hydraulic disc brakes with amechanical parking brake provides excellent performance and enhanced safety.



Transmission

The MECHRON uses a continuously variable transmission(CVT) and has a time proven Daedong gear box with two speeds, (Hi/Lo) and 4WD.

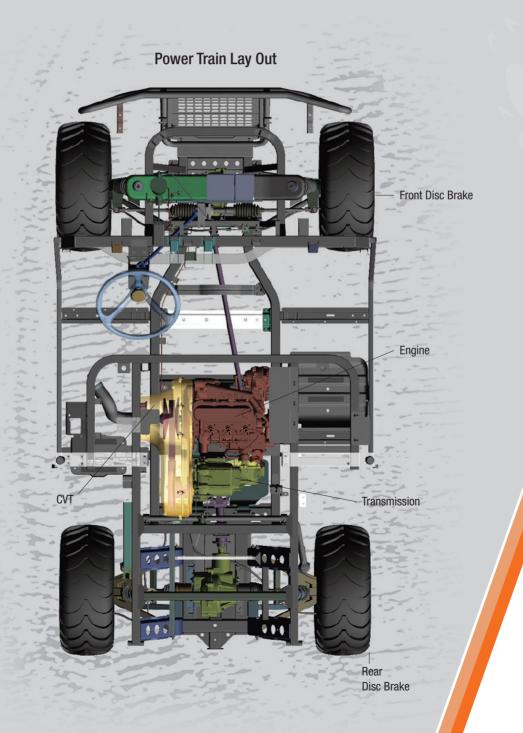

POWERFUL ACCELERATION WITH A DAEDONG DIESEL ENGINE



Solid Frame

Robust body frame with strong tubular steel and welded ROPS will protect drivers and passengers.



Rear Hitch Receiver

A 2-inch rectangular hitch receiver enables you to attach a trailer and receiver equipped implements.



Differential Locks

• Front : Limited Slip Differential

• Rear: Mechanically Actuated Differential Lock



Front Suspension

A MacPherson Strut type suspension ensures the best ride of all the competition while providing the driver excellent road-feel and control.



Tire Options

With four tire options, owners can customize the MECHRON to fit their needs. Aluminum wheels are available on Heavy Duty, ATV and Tomahawk tires.



Ground Clearance

Don't get stuck on the trail. With 12 inches of ground clearance, you can easily climb over obstacles.



Adjustable Rear Suspension

With an adjustable Wishbone type suspension, you can fine tune the MECHRON for the smoothest possible ride whether carrying a load or empty.



Wheels

Larger 12-inch wheels and 25-inch tires provide a smooth ride and more ground clearance.



Rear Fenders

Reinforced, molded rear fenders mounted under the bed deck keep you and your MECHRON clean under the muddlest conditions.





Floor

With a flat walk-thru design, the MECHRON has excellent leg and foot room for easy entry and exit.

2-Row seating of the MECHRON 2240 provides a comfortable environment for 4 people.



Dash Board

With its cockpit-like looks, the ergonomically located controls and instruments allow the driver to view critical functions at a glance.



Shift Levers

An in-line shift makes range selection simple and easy. 4WD selection and rear differential lock are engaged with a single pull knob.



Canopy (Option)

An impact resistant plastic canopy helps to protect the driver and passengers.



Hood

The sleek design of the reinforced plastic hood provides a strong and dynamic look.



Brush Guard

The heavy duty steel brush guard offers protection for the headlights and radiator from rocks, tough brush, and other debris on the trail.



Cargo Bed

The MECHRON provides excellent payload capabilities and has the widest cargo bed in its class.

Add the optional hydraulic dump kit and you can easily place any load where you want it.



Bench Seat

With a contoured bench seat that is the widest in its class, the 2200 offers room to seat three comfortably. Seat belts are standard for safety.



Storage Compartments

An open dash storage area on the driver side is complemented by a closed dash storage area with a water proof lid on the passenger side.







ISO 9001 NO.954596

Sun Canopy Kit
 Windshield Kit
 Windshield Wiper Kit
 Hydraulic Dumping Kit
 Remote Hydraulic Kit
 Hand Throttle Kit
 Skid Plate Kit
 Rear Screen Kit
 Suspension Dust Guard Kit

· CV Guard Kit

Horn
 Fog Lamp Kit
 Working Lamp Kit
 Headrest Kit
 Side View Mirror Kit
 Side Rail Extension Kit
 License Plate Kit
 Parking Brake Buzzer Kit

Winch Kit

• Front Hitch Receiver Kit

• Muffler Spark Arrester Kit

Field Option Cab (MECHRON 2200 only)Soft Cabin Kit (MECHRON 2200 only)

ISO 14001 NO.771475

OPTIONAL EQUIPMENT

OHSAS 18001

SPECIFICATIONS

MODEL		MECHRON2200	MECHRON2200PS	MECHRON2240	
ENGINE					
Model			3C100LFU-4		
Туре			3Cyl., In-line Vertical, Water-cooled 4-cycle diesel engine		
Engine Gross	hp (kW)		22 (16.4)		
Displacement	cu. in. (cc)		61.45 (1,007)		
Rated Revolution	Revolution rpm		2,800		
uel Tank Capacity US gal. (ϱ)			7.4 (28)		
DRIVE TRAIN					
Гуре			Type Belt CVT		
Gear Range			Low, High, Neutral, Reverse		
Ground Speed	mph (km/h)		0-25 (0-40)		
Brake		Fr	Front/Rear Hydraulic Dry Caliper Disc		
SUSPENSION					
ront Suspension		In	Independent, MacPherson Strut type		
Rear Suspension		Indep	Independent, Double A-Arm (Wishbone type)		
STEERING					
туре Туре		Rack & Pinion	Hvdrau	lic Power	
DIMENSIONS / CAPACI	ITY				
ength	in. (mm)	112.9	3 (2,852)	146.7 (3,725)	
Vidth	in. (mm)		60.7 (1,543)	(0). 20)	
leight	in. (mm)	76.4 (1,940)			
Max.Wheel Tread	Front in. (mm)		49.7 (1,262)		
	Rear in. (mm)		48.3 (1,228) 49.8 (1,264)		
Vheelbase	in. (mm)		(1,940)	108.7 (2,760)	
Veight (with ATV Tires)	lbs. (kg)		1,939 (979.5)	2,252 (1,021.5)	
Ground Clearance	in. (mm)	<u> </u>	12 (304)		
owing Capacity	lbs. (kg)	1,300 (590)			
ayload Capacity	lbs. (kg)	1,598 (725)			
Turning Radius	ft. (m)		13.1 (4) 17.7 (5.4)		
Seat Capacity / Style	()		3 / Bench 2 Per Bench / 2 Bench Seat		
CARGO BED		3,	2011011	2 T of Bottom / E Bottom Code	
ength x Width x Depth	in. (mm)	30	3.6 (980)×56.2 (1,427)×11.5 (203)	
Bed Capacity	lbs.(kg)		1,102 (500) 662 (300)		
Oump Box Actuation	ibo.(ng)	1,10	Manual		
TIRE SIZE			iviariuai		
IIIL OILL	Heavy Duty Worksite		25×10-12		
Front	Turf		26×9.5-12		
	ATV		25×10-12		
	Tomahawk		25×10-12		
	Heavy Duty Worksite		25×10-12		
	Turf		26×9.5-12		
	ATV		25×11-12		
	Tomahawk		25×10-12		
	TOTTIATIAWN		20010-12		
NUN			Red / Green		
Body Color	ıT		neu / dieeii		
Body Color STANDARD EQUIPMEN	IT				
Body Color BTANDARD EQUIPMEN Front Guard	IT		Standard		
Body Color BTANDARD EQUIPMEN Front Guard Speedometer	IT		Standard Standard		
BODY Body Color STANDARD EQUIPMEN Front Guard Speedometer Rear Hitch Receiver Safety Lamp Kit (Brake Lights, Turn			Standard		

 $[\]ensuremath{^{\star}}$ NOTE : Specifications and design are subject to change without notice.



Winch Bracket

KIOTI Tractor Division

DAEDONG - USA, INC. 6300 KIOTI Drive, Wendell, NC 27591 USA Toll free 877-G0-KIOTI • Fax 919-374-5001 Web www.KIOTI.com

Optional









Dealer Imprint Area

Optional

Standard